
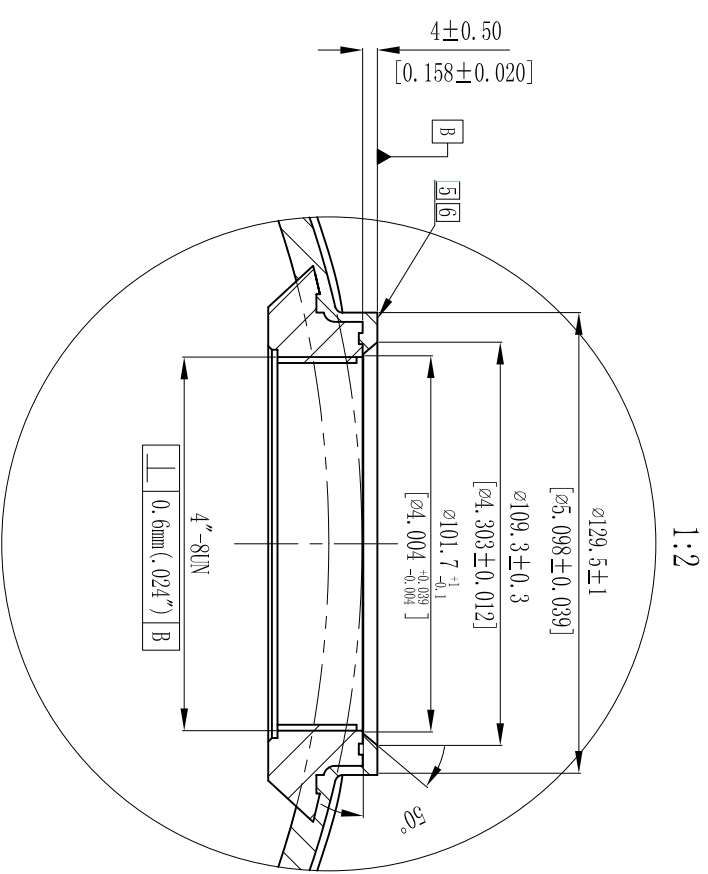


MODEL	A		VOLUME	DOME VOLUME		WEIGHT						
	mm	inch		liters	U.S. gal		cubic FT	liters	U.S. gal	cubic FT	Kg	LBS
16x65	1662	65.43	6	.24	194L	51.25	6.85	9.15	2.42	0.32	29.12	64.06

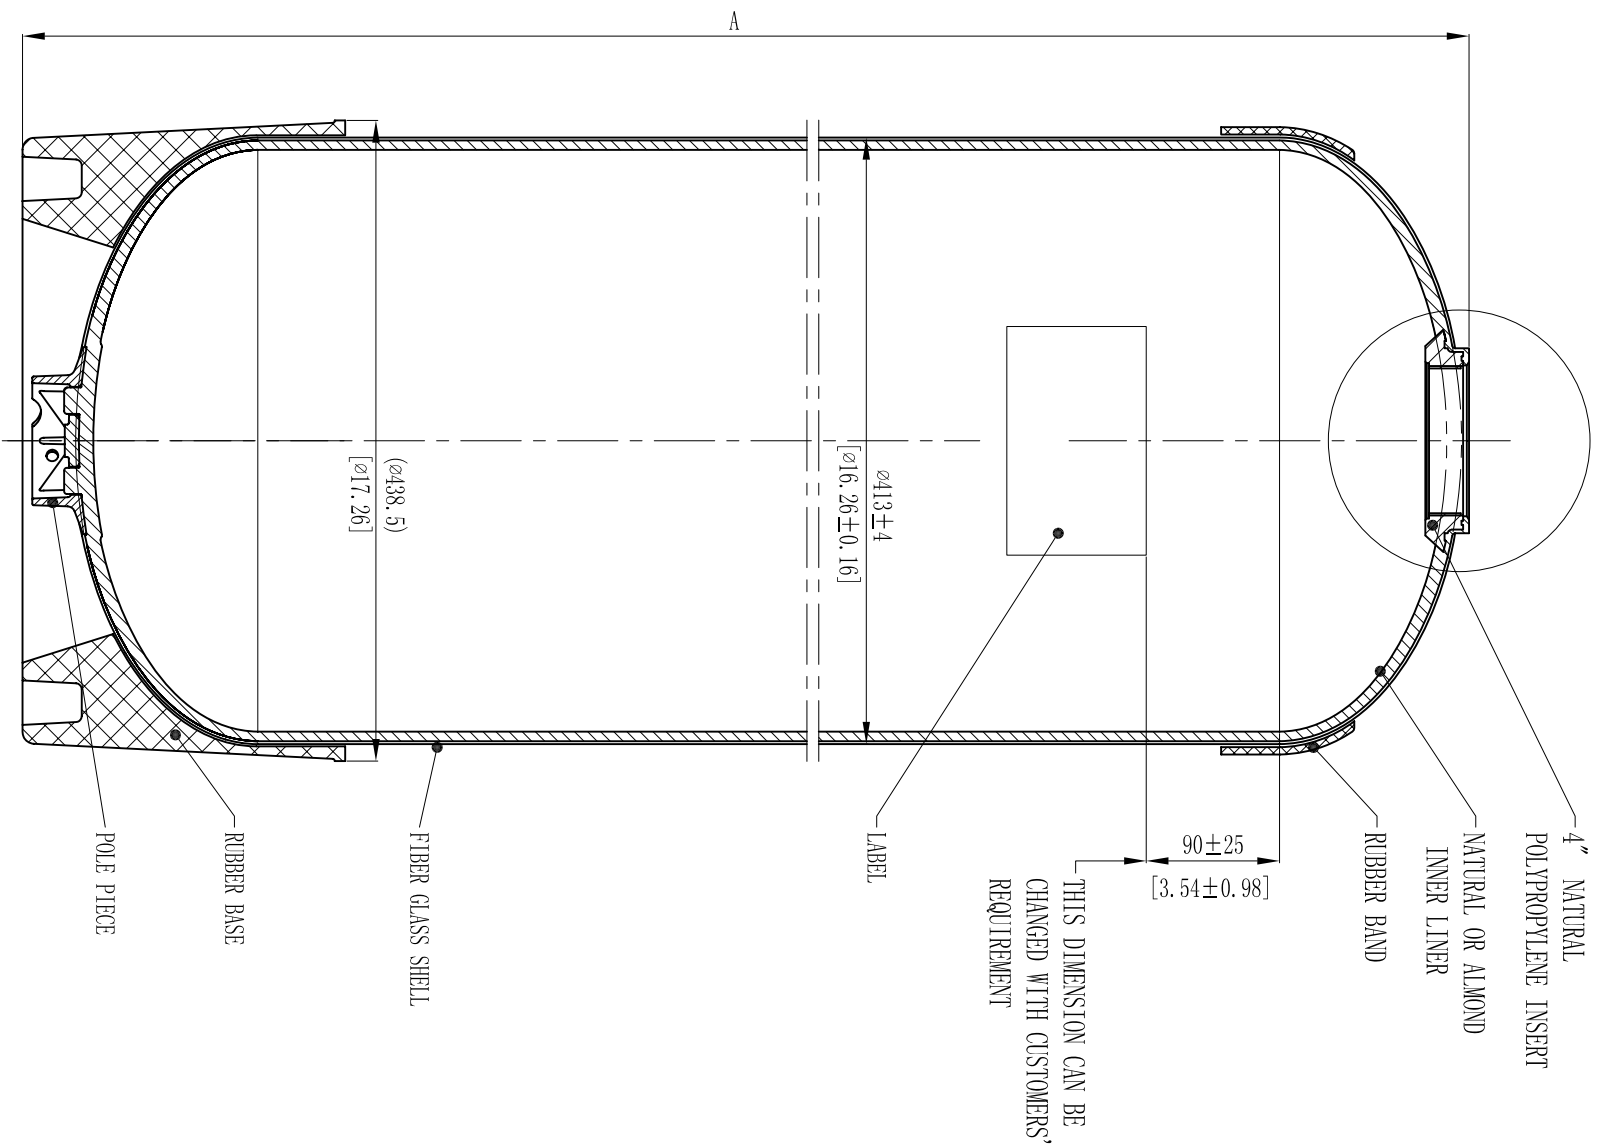

- NOTES:
- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-120° F (-1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - SURFACE FINISH.
 - DIMENSIONS IN PARENTHESES ARE REFERENCE ONLY.
 - DIMENSIONS IN SQUARE PARENTHESES ARE INCH UNIT.

0	FIRST REVISION:				
VERSION NO.	REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):	SIGNATURE	DATE	DESCRIPTION OF CHANGES:	SIGNATURE
SIGNATURE		NAME	DATE	WAVE CYBER (SHANGHAI) CO., LTD.	
DESIGN	SCALE	MATERIAL	MODEL	DESCRIPTION	
INSPECTION	1 : 5		16" (4" DI) FRP VESSEL		
APPROVAL	QUANTITY	SMOOTHNESS	(RUBBER BASE)		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			PROJECTION	COMPUTER CODE	DRAWING NO.
DO NOT MEASURE THE DIMENSIONS.					116162-00
			UNIT: MM	VERSION NO.	0
			TOTAL PAGE: 1		